




- **TERRACOTTA**
- **QUARRY TILE**
- **UNPOLISHED STONE AND AGGLOMERATES**

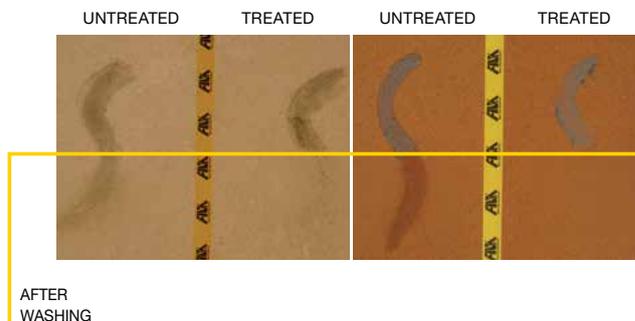

Anti-stain testing carried out on Vicenza Stone and terracotta. The untreated section absorbed the cement deep down, which made washing after laying difficult. The treated part did not absorb the cement, which was easy to remove with a specific detergent.

WHAT IT'S FOR

- Water-repellent protector against laying dirt, that makes grouting and cleaning easier without altering the material's appearance.
- Ideal for absorbent materials such as terracotta, quarry tiles, natural and reconstructed stone and agglomerates.

ADVANTAGES

- It protects from dirt caused by grouting.
- It does not affect adhesion between grout and material.
- It eases grout clean up.
- It reduces drying times, making subsequent treatment faster.
- It does not alter the appearance of the material.
- Easy to apply.
- After the application it is possible to apply any kind of protection treatment.
- **Very low VOC emission product:** certified by GEV and marked EC1 PLUS* and helps towards achieving credits for LEED**.

HOW IT'S USED

No dilution: Ready to use.
Application: Shake the flask before opening. Make sure the surface to be treated is completely free of dust. Apply an even coat of FILAPRW200 using an airless spray pump, avoiding surface pooling. A paintbrush or lambswool applicator pad may also be used. Ensure the product also covers the edges of the laid material. Grouting can be applied the day after laying. Once cured, wash using the most suitable detergent for the kind of material used. Assess which type of subsequent protective treatment to complete the protection cycle.

Caution: Carry out a patch test on a small surface area to check for any changes in colour. Do not apply the product externally if rain is forecast.

COVERAGE

With one litre (1,06 QT):

Terracotta	7/10 m ² (75/108 sq ft)
Stone	10/20 m ² (108/215 sq ft)

"Coverage rates are approximate and refer to a single coat of the product"

Packaging

1 liter (1.06 qt) flasks in box of 12.

<p>PRECAUTIONS</p> <ul style="list-style-type: none"> • Keep out of the reach of children. • Dispose of the container properly after use. • The product is not frost-proof in its can. <p>TEMPERATURE Storage temperature: between 41° F (5° C) and 86° F (30° C). Must be applied to material at temperatures between 50° F (10° C) and 86° F (30° C).</p>
--

<p>LABELLING KEEP OUT OF THE REACH OF CHILDREN. First aid: In case of contact flush with running water. Seek medical advice if irritation develops. If swallowed, consult a physician or poison control center.</p>	<p>TECHNICAL INFORMATION Appearance: liquid Color: milky white Odour: distinctive, resinous Density: 0.999 kg/litre pH: 4.7</p> <p><i>The information above reflects our latest technical know-how and is the outcome of ongoing laboratory research and testing. However, some factors are beyond our control. It is essential to integrate our suggestions with your own on-site preliminary tests and check. Fila accepts no liability for improper use of its products.</i></p>
---	--

*GEV (Association for the Control of Emissions in Products for Flooring Installation, Adhesives and Building Materials) certifies with EC1 PLUS "very low emission" products.

**LEED (Leadership in Energy and Environmental Design) is a certification for the development of 'green' buildings.