

PRODUCT GUIDE

ORGANIZATION & ACCESSIBILITY

For Baths & Showers

Con	11/2 611	
19	Baskets4-10	Foot Props23
	Hooks 11-13	Claddy-T™ Shelf24
	Towel Bars 14	Glass Tile Shelving 25
	Toilet Paper Holders 15	Rough-In Anchors 26-27
	Grab Bars 16-22	Waterproofing28



using penetrating wall anchors





with Waterproof Wall Anchors



If you are including a luxurious tile shower in your bathroom renovation or build, there is an important cautionary tale to tell that protects you from disappointment, potential health concerns, and investment losses. Building tile showers correctly requires much more than just installing beautiful tiles. Though tile is a durable, hard surface with water-resistant characteristics, it requires a highly-skilled installation process that integrates vital and effective waterproofing in order to prevent water-based damage from occurring. These processes manage and restrict how water correctly enters the space while moving toward the drain, ultimately creating a defense barrier against bacteria, which will grow and spread rapidly when waterproofing is not included or violated.

To prevent damage, proper waterproofing must occur behind the tile on the tile board. Though you can't see these systems after the tile is installed, they are designed to keep water and water vapor away from organic materials like structural wood studs and plywood. When **penetrating wall anchors** are used, they require drilling through the tile and membrane and into the interior wall cavity, allowing water to infiltrate the space. This causes wood materials to grow bacteria and decay, creating both health hazards and structural weaknesses. Suffice it to say, this is why waterproofing requires and comes with manufacturers' warranties.


Metal-mounted shower accessories like plumbing-grade shelves, hooks, grab bars, seats, hand showers, and shower doors are all products that can destroy waterproof systems. When these products are mounted using traditional **penetrating wall anchors**, they violate and void waterproofing intentions and warranties.

TileWare Products® stops these penetrations and the devastating effects of water infiltration with our patented PermaTile™ **Waterproof Wall Anchors**. Our approach is to combine anchoring with waterproofing (behind the tile) into a singular system which in turn protects the lifelong integrity of the waterproofing envelope (the space that contains and directs the flow of water to the drain). Our PermaTile™ anchors were designed to mate with our minimally-designed accessory products (illustrated in this Product Guide), which are easily installed. Our methods not only ensure proper waterproofing but, once our accessories are mounted, they are simply stronger. In addition, over the past 12 years, we have substantiated that our mounts will never loosen or pull away from your tile surfaces. By including our products in your tile shower, you will enjoy a well-organized space that features outrageous strength and reliability while having peace of mind that your investment is protected.

We are excited and grateful for your engagement with PermaTile™ anchoring.
BUY US ONCE FOR LIFE. Attach to, Not through.

Shower Accessory Worksheet

Use this worksheet

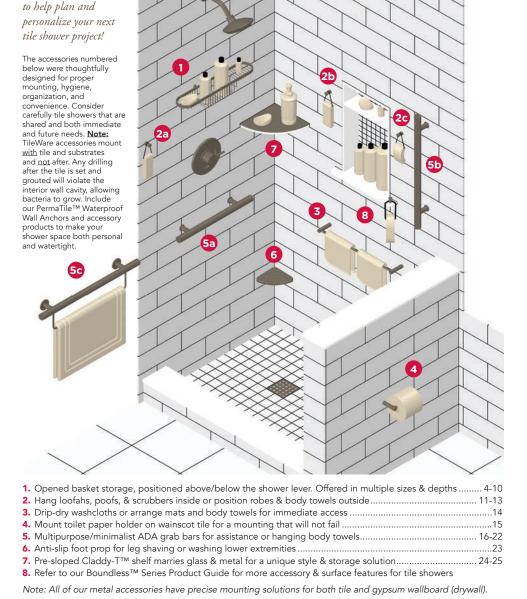

CAP STYLES & FINISHES

Select the cap that best resembles your shower lever.



Contemporary (ends in 1)















Polished Chrome (PC)



Traditional (ends in 2)












Rectangular Soap Basket

Storage solutions for personal care products





Brushed Gold (BG)


Matte Black (BLK)

Brushed Nickel (BN)

Oil Rub Bronze (ORB)

Polished Chrome (PC)







(SKU)	T 100-001-BG*	T 100-001-BLK	T 100-001-BN
Model	T 100-001-ORB	T 100-001-PC	

^			
(SKU)	G 100-001-BG	G 100-001-BLK	G 100-001-BN*
Model	G 100-001-ORB	G 100-001-PC	

TX	Trim Only Kit	Plated Stainless Steel
Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)		

PT	Rough-In Only Kit	Stainless Steel
Tile Thickness Range		Tile Substrates (pg 4)
5/32"- 1/2" (4mm - 13mm)		Surface Mount to Substrate






	TX 100-001-FINISH	
lodel (SKU)	PT 100-504	Square Wall Anchor
Model	Page 26	Equals <u>27-37%</u> cost of <u>Complete Kit</u> (based on finish selected)

Shampoo Basket

Storage solutions for personal care products



FINISHES

Brushed Gold (BG)

Brushed Nickel (BN)

Polished Chrome (PC)



Complete Kit

Plated Stainless Steel

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm) **Tile Substrates (pg 4)**Surface Mount to Substrate



Complete Kit

Plated Stainless Steel

Gypsum Wallboard Surface

Wallboard Substrates (pg 5) 1/2", Attach to Blocking



T100-002-BG

T100-002-BN

T100-002-PC*



G100-002-BG G100-002-BN* G100-002-PC



Trim Only Kit

Plated Stainless Steel

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm) Rough-In Only Kit
Tile Thickness Range
5/32"- 1/2" (4mm - 13mm)

Tile Substrates (pg 4)Surface Mount to Substrate

Stainless Steel





(sold separately)

X 100-002-FINISH


PT 100-505
Page 26


Rectangular Wall Anchor

Equals 27-32% cost of Complete Kit (based on finish selected)

Shallow Corner Soap Basket

Storage solutions for personal care products







FINISHES

Brushed Gold (BG)

Brushed Nickel (BN)

Oil Rub Bronze (ORB)

Polished Chrome (PC)



Complete Kit

Plated Stainless Steel

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm) **Tile Substrates (pg 4)** Surface Mount to Substrate



Complete Kit

Plated Stainless Steel

Gypsum Wallboard Surfaces

Wallboard Substrates (pg 5) 1/2", Attach to Blocking



(SKU)	T 100-003-BG	T 100-003-BN	T 100-003-ORB*
Model	T 100-003-PC		



G 100-003-BG* G 100-003-BN G 100-003-ORB

TX

Trim Only Kit

Plated Stainless Steel

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm) PT

Rough-In Only Kit

Stainless Steel

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm) **Tile Substrates (pg 4)** Surface Mount to Substrate





TX100-003-BG

TX100-003-PC*

TX 100-003-B

TX100-003-OR

TX100-003-PC*



X 100-003-FINISH


PT100-506
Page 26

Corner Wall Anchor

Equals <u>28-36%</u> cost of <u>Complete Kit</u> (based on finish selected)

Deep Corner Basket

Storage solutions for personal care products





FINISHES


Brushed Gold (BG)

Matte Black (BLK)

Brushed Nickel (BN)

Polished Chrome (PC)









(SKU)	T 100-004-BG	T 100-004-BLK*	T 100-004-BN
dodel	T 100-004-PC		












Combination Basket

Storage solutions for personal care products








FINISHES



Oil Rub Bronze (ORB)










(SKU)	T 100-030-BG*	T 100-030-BN	T 100-030-ORB
Model	T 100-030-PC		



TX	Trim Only Kit	Plated Stainless Steel
Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)		

PT	Rough-In Only Kit	Stainless Steel
Tile Thickness Range		Tile Substrates (pg 4)
5/32"- 1/2" (4mm - 13mm)		Surface Mount to Substrate






PT100-505
Page 26
Equals 13-17% cost of Complete Kit (based on finish selected)

Model (SKU)

Extra Deep Corner Basket

Storage solutions for personal care products



FINISHES

Brushed Gold (BG)


Matte Black (BLK)

Brushed Nickel (BN)

Oil Rub Bronze (ORB)

Polished Chrome (PC)







(SKU)	T 100-050-BG	T 100-050-BLK	T 100-050-BN
Model	T 100-050-ORB	T 100-050-PC*	



	TX	Trim Only Kit	Plated Stainless Steel
Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)			

PT	Rough-In Only Kit	Stainless Steel
Tile Thickness Range		Tile Substrates (pg 4)
5/32"- 1/2" (4mm - 13mm)		Surface Mount to Substrate






Mates with (sold separately)

(SKU		'X' Corner Wall Anchor
Model		Equals <u>20-27%</u> cost of <u>Complete Kit</u> (based on finish selected)

Extra Deep Shampoo Basket

Storage solutions for personal care products



FINISHES

Brushed Gold (BG)

Matte Black (BLK)

Brushed Nickel (BN)

Polished Chrome (PC)






_			
(SKU)	T 100-060-BG	T 100-060-BLK	T 100-060-BN*
Model	T 100-060-PC		


G Complete Kit Plated Stainless Steel

Gypsum Wallboard Surfaces Wallboard Substrates (pg 5)
1/2", Attach to Blocking





PT	Rough-In Only Kit		Stainless Steel
Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)		T S	ile Substrates (pg 4) urface Mount to Substrate
			_





TX 100-060-FINISH

PT 100-505
Page 26

Rectangular Wall Anchor

Equals 17-22% cost of Complete Kit (based on finish selected)

Cone Hook

Organize anything that hangs with a rope



CAP STYLES

Contemporary (ends in 1)

Conds in 1)

Conds in 1)

Conds in 2)

Brushed Gold (BG)

Brushed Nickel (BN)

Oil Rub Bronze (ORB)

Polished Chrome (PC)

Tile Thickness Range 5/32" - 1/2" (4mm - 13mm)

Tile Substrates (pg 4)


Surface Mount to Substrate

G Complete Kit Plated Stainless Steel

Gypsum Wallboard Surfaces Wallboard Substrates (pg 5) 1/2", Attach to Blocking



T101-111-BG T101-111-BN* T101-111-ORB T101-112-BN T101-112-ORB T101-112-PC T101-112-PC





PT Rough-In Only Kit Stainless Steel

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm) Surface Mount to Substrate





Model (SKU)

Promessa[™] Series Tee Hook

Organize anything that hangs with a rope





CAP STYLES Contemporary (ends in 1) Traditional (ends in 2)





FINISHES










Polished Chrome (PC)

Т	Complete Kit	Plated Stainless Steel
		ile Substrates (pg 4)

Best hook for body towels & robes





(SKU)		T101-211-BN T101-212-BN
	T 101-211-PC T 101-212-PC	

TX	Trim Only Kit	Plated Stainless Steel	Pī
	ckness Range		Tile 1



(SKU)			G 101-211-BN G 101-212-BN*
	G 101-211-ORB G 101-212-ORB	G 101-211-PC G 101-212-PC	

PT	Rough-In Only Kit	Stainless Steel
Tile Thickness Range		Tile Substrates (pg 4)
5/32"- 1/2" (4mm - 13mm)		Surface Mount to Substrate






TX1 TX1			

PT 100-507	Round Wall Anchor
Page 26	Equals 37-43% cost of Complete Ki
	(based on minst selected)

Model (SKU)

Thumb Hook

Organize anything that hangs with a rope




	TYLES	CAP ST	
FINISHES	Traditional (ends in 2)	Contemporary (ends in 1)	
Brushed Gold (BG)			
Brushed Nickel (BN)			
Oil Rub Bronze (ORB)			
Polished Chrome			1


(PC)

Tile Thickness Range
5/32" - 1/2" (4mm - 13mm)

Tile Substrates (pg 4)
Surface Mount to Substrate









Model (SKU)

G 101-311-PC **G** 101-312-PC





Promessa[™] Series 18" Towel Bar

Hang mats, towels & washcloths



F11.1161.1F6	YLES	CAP ST
FINISHES	Traditional (ends in 2)	Contemporary (ends in 1)
Brushed Gold (BG)		
Matte Black (BLK)		
Brushed Nickel (BN)		
Oil Rub Bronze (ORB)		
Polished Chrome (PC)		

Complete Kit **Plated Stainless Steel** Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)

Tile Substrates (pg 4)Surface Mount to Substrate

Complete Kit Plated Stainless Steel Wallboard Substrates (pg 5) 1/2", Attach to Blocking Gypsum Wallboard Surfaces





		T102-011-BN T102-012-BN
	T 102-011-PC T 102-012-PC	

	G 102-011-BG G 102-012-BG	G 102-011-BLK G 102-012-BLK	G 102-011-BN G 102-012-BN
	G 102-011-ORB G 102-012-ORB*	G 102-011-PC G 102-012-PC	
_			

Trim Only Kit **Plated Stainless Steel** Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)

PT	Rough-In Only Kit	Stainless Steel
Tile Thickness Range		Tile Substrates (pg 4)
5/32"- 1/2" (4mm - 13mm)		Surface Mount to Substrate






Promessa[™] Series **Toilet Paper Holder**

Paper holders that stay firmly mounted







CAP STYLES **Traditional**

Contemporary (ends in 1) (ends in 2)





FINISHES



Matte Black (BLK)



(BN) Oil Rub Bronze (ORB)





Complete Kit

Plated Stainless Steel

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)

Tile Substrates (pg 4) Surface Mount to Substrate



Complete Kit

Plated Stainless Steel

Wallboard Substrates (pg 5) 1/2", Attach to Blocking **Gypsum Wallboard Surfaces**





		
TX	Trim Only Kit	Plated Stainless Steel

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)



Model (SKU)

Rough-In Only Kit

G 105-011-PC **G** 105-012-PC

Stainless Steel

e Kit

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)

G 105-011-ORB **G** 105-012-ORB

Tile Substrates (pg 4) Surface Mount to Substrate



Mates with (sold separately)

(SKU)	TX 105-011-BG TX 105-012-BG*		TX 105-011-BN TX 105-012-BN
	TX 105-011-ORB TX 105-012-ORB	TX 105-011-PC TX 105-012-PC	




PT 100-516	5-1/2" On Center Round Wall Anchor
Page 27	Equals <u>27-32%</u> cost of <u>Complet</u> (based on finish selected)

Model (SKU)

ADA 18" Straight Grab Bar

Accessibility Grab Bars for inside & outside the shower



CAPSTYLES		
Contemporary Traditional (ends in 1) (ends in 2)		

CARCTMEC





FINISHES



Matte Black (BLK)



Brushed Nickel (BN)



Oil Rub Bronze (ORB)





Polished Chrome (PC)



Complete Kit

Plated Stainless Steel

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm) Tile Substrates 1/2" (pg 4) Integrate into Substrate



_			
(SKU)	T200-001-BG T200-002-BG		T200-001-BN T200-002-BN*
Model	T 200-001-ORB T 200-002-ORB	T200-001-PC T200-002-PC	

Trim Only Kit **Plated Stainless Steel** **Complete Kit Plated Stainless Steel** Wallboard Substrates (pg 5) 1/2" or 5/8", Attach to Blocking



		G 200-001-BN G 200-002-BN
	G 200-001-PC G 200-002-PC*	

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)

PT	Rough-In Only Kit	Stainless Steel	
Tile Thickness Range		Tile Substrates, 1/2" (pg 4)	
5/32"- 1/2" (4mm - 13mm)		Integrate into Substrate	





Equals 28-34% cost of Complete Kit (based on finish selected)

Page 27

Victoria[™] Series **CAP STYLES** FINISHES **ADA 24" Straight Grab Bar** Contemporary **Traditional** (ends in 2) (ends in 1) Accessibility Grab Bars for inside & outside the shower **Brushed Gold** (BG) **Matte Black** (BLK) **Brushed Nickel** (BN) Oil Rub Bronze (ORB) **Polished Chrome** (PC)



Kit Includes Waterproof Gasket Referenced Below **WG**100-509 Page 28 Model (SKII)

~		T 200-011-BN T 200-012-BN
	 T200-011-PC T200-012-PC	


,	1200-012-BG	1 200-012-BLK	I 200-012-BN	S	G 200-012-BG	G 200-012-BLK	G 200-012-BN
•		T200-011-PC T200-012-PC				G 200-011-PC G 200-012-PC	
				_			


€ G 200-011-BG


TX	Trim Only Kit	Plated Stainless Steel	PT	Rough-In Only Kit	Stainless Steel
Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)					Tile Substrates, 1/2" (pg 4) Integrate into Substrate





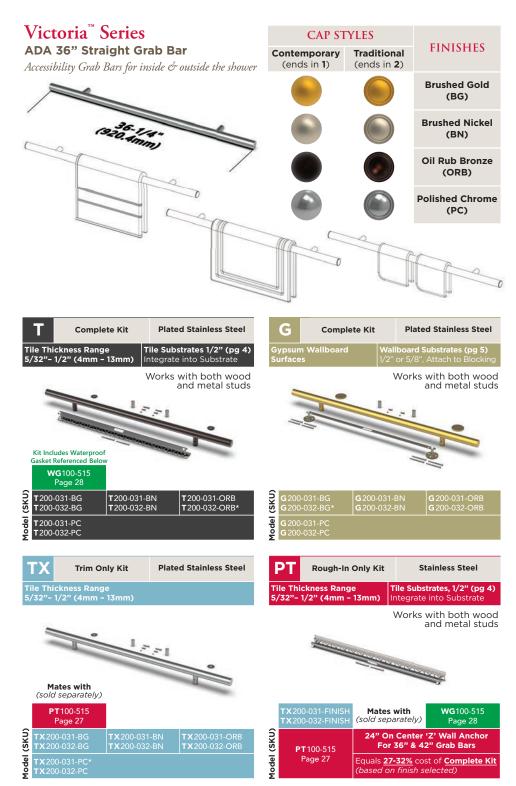

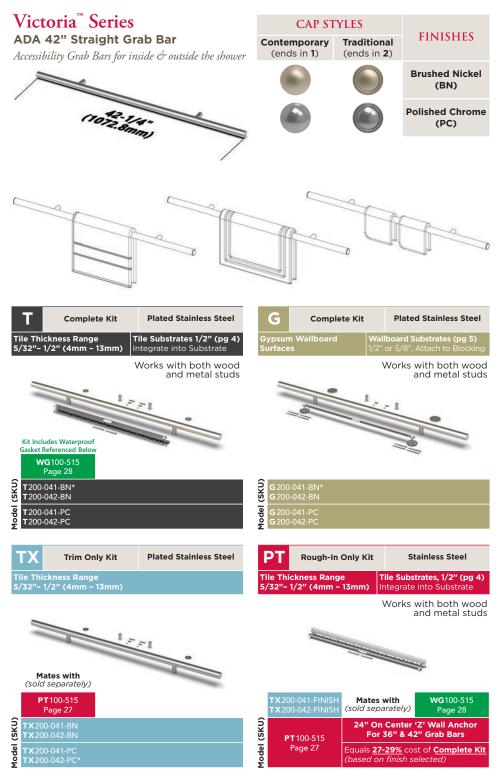

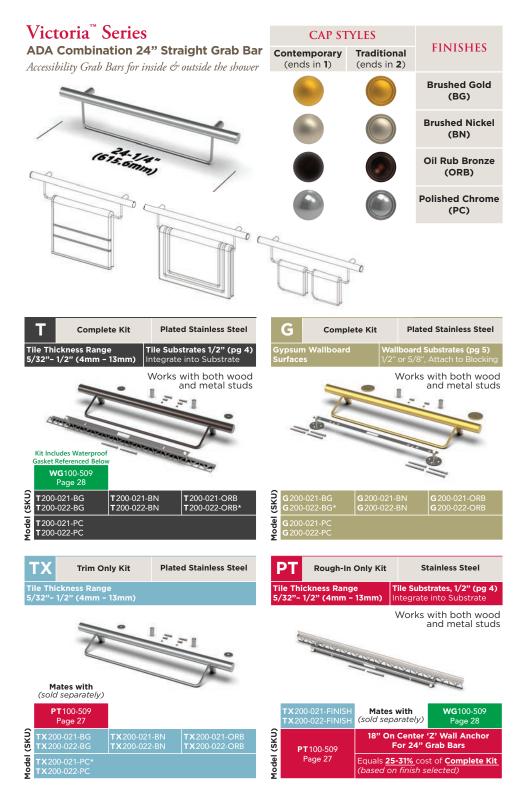

ADA 24" Curved Grab Bar

Accessibility Grab Bars for inside & outside the shower









Plated Stainless Steel

Complete Kit

G 201-011-ORB **G** 201-012-ORB

TX	Trim Only Kit	Plated Stainless Steel			
Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)					
	1920				

PT	Rough-In Only Kit	Stainless Steel	
Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)		Tile Substrates, 1/2" (pg 4) Integrate into Substrate	
		Works with both wood	

G201-011-PC **G**201-012-PC




10del (SKU)



PT 100-509
Page 27
Page 28-33% cost of Complete Kit (based on finish selected)

ADA Combination 24" Curved Grab Bar

Accessibility Grab Bars for inside & outside the shower



CAP STYLES

FINISHES









Brushed Nickel (BN)











Polished Chrome (PC)



Complete Kit

Plated Stainless Steel

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm) Tile Substrates 1/2" (pg 4) Integrate into Substrate



	WG 100-509 Page 28
3	T201 021 BG

T201-021-BN T201-022-BG T201-022-BN

T201-021-ORB T201-022-ORB

Model **T**201-021-PC T201-022-PC*

Complete Kit

Plated Stainless Steel

Wallboard Substrates (pg 5) 1/2" or 5/8", Attach to Blocking Gypsum Wallboard



Model **G** 201-021-PC **G** 201-022-PC

Trim Only Kit

Plated Stainless Steel

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)

Rough-In Only Kit

Stainless Steel

Tile Thickness Range "- 1/2" (4mm - 13mm) Tile Substrates, 1/2" (pg 4) Integrate into Substrate Works with both wood

Mates with (sold separately)

PT100-509 Page 27

	TX201-021-BG* TX201-022-BG	TX201-021-ORB TX201-022-ORB
ē	TX201-021-PC	

10del (SKU)

Mates with (sold separately)

(based on finish selected)

WG100-509 Page 28


and metal studs

PT100-509 Page 27

18" On Center 'Z' Wall Anchor For 24" Grab Bars Equals 25-31% cost of Complete Kit

Foot Prop

Assist & leg shaving foot rest...hotelier utility





Brushed Gold (BG)

FINISHES



Matte Black (BLK)



Brushed Nickel (BN)



Oil Rub Bronze (ORB)



Polished Chrome (PC)











Structural Surfaces[™] Series

Claddy-T™ Shelf (Tile-over Tray)

Corner shelf mates with glass on page 25




(BG)

Oil Rub Bronze

Polished Chrome

grout spacing

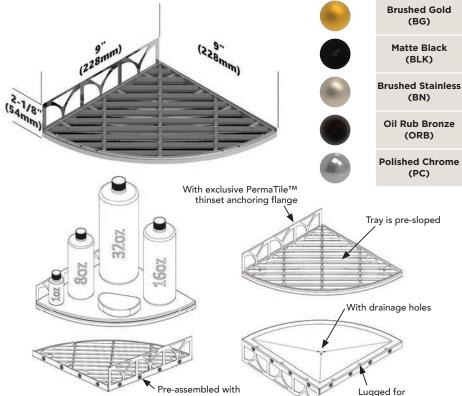


T Complete Kit	Stainless Steel	Mates with (sold separately)
Tile Thickness Range	Tile Substrates	T 400-001-COLOR
5/32"- 1/2" (4mm - 13mm)	Surface Mount to Substrate	Page 29

8 stainless steel screws





(SKU)	T 300-001-BG	T 300-001-BLK	T 300-001-BN
Model	T 300-001-ORB	T 300-001-PC	

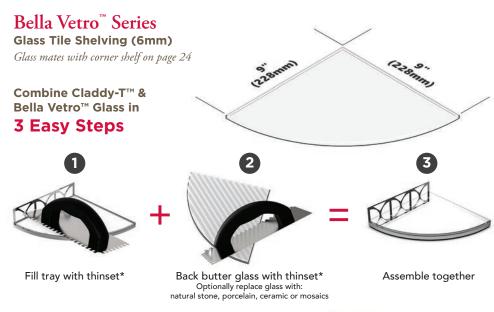

Actual Bella Vetro™ color hand board visible at authorized TileWare reseller



Individual Carton	Fused Glass	Mates with (sold separately)
Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)	Glass Tile Shelving is manufactured by glass with ceramic glazes at a high to	
Basket	Canvas	Cloth
Cotton	Haze	Loft
Mink	Petra	Raven
Safari	Vellum	
(NXS) T400-001-COLOR	All shelves are 6mm thickness. Glass Tile Structural Surfaces™ Series Claddy-T™ S	


PermaTile[™] Series


Rough-In Tile Wall Anchors

Always keep your tile project moving with Rough-In!


Anchoring Features and Benefits:

- 1. Anchors that Never Fail
- Super Strong Like Rebar in Cement 2.
- 3. Stainless Construction - Will Not Rust
- 4. Stops Unwarranted Hole Drilling
- 5. **Protects Waterproofing Systems**
- Professional Anchoring Technology 6.
- 7. Tile Exclusive System
- 8. Easy to Install & Maintenance Free
- 9. Tested by the TCNA
- 10. Installs with Machine Screws NOT Wood Screws












USE ONLY LATEX-MODIFIED THINSET THAT MEET ANSI A118.4/A118.15 PERFORMANCE STANDARDS














Secure[™] Series

Waterproofing Membranes

Waterproof wall anchoring w/ bonded shower systems

Combine WG100-509 with PT100-509



This product works similarly to other waterproofing banding and seal tape products. Use only tile-specific waterproof membranes with an embedded non-woven fleece fiber. Use a 1/4" x 3/16" V-notch towel (or similar). Press TileWare's waterproofing gasket into thinset and substrate using the flat side of a trowel or a 6" taping knife. (Please refer to instruction instructions before installing)

Combine WG100-514 with PT100-514



Combine WG100-515 with PT100-515



Waterproofing Features and Benefits:

- 1. Works with Foam, Sheet, or Liquid
- 2. Install with A118.4 or A118.15 thinset
- 3. One piece install with rubberized collars
- 4. Waterproofs with 'Z' anchor mountings

WG	Gaske	Gasket Only		n Fleece embrane
Tile Installation 5/32"- 1/2" (4mm - 13mm)			ile Substrates urface Mount to	Substrate
=				
Model (SKU)	WG 100-509	18" On Ce For 24" G	nter Waterproo rab Bars	fing Gasket
Mates v	vith (sold sep	parately)		
	1-FINISH 2-FINISH	Page 17	PT 100-509	Page 27
T200-021-FINISH			Page 27	
T201-011-FINISH T201-012-FINISH		Page 21	PT 100-509	Page 27
T201-021-FINISH T201-022-FINISH		Page 22	PT 100-509	Page 27







Complete Kit

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)

Kit includes: (1) PermaTile™ Rough-In Anchor with all the trim & screw components necessary to complete one tile installation





Trim Only Kit

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)

Kit includes: trim & screw components (only) for one tile installation. Mating PermaTileTM Rough-In Anchor packed and sold separately





Rough-In Only Kit

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)

Kit includes: (1) PermaTile™ Rough-In Anchor (only) for one tile installation. Mating trim & screw components packed and sold separately





Membrane Only

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)

Kit includes: (1) Waterproofing membrane (only) for one tile installation. Mating trim & screw components (TX) and/or PermaTile™ Rough-In Anchor (PT) are packed and sold separately





Complete Kit


Gypsum Wallboard Surfaces 1/2" or 5/8" (Attaches to blocking)

Kit includes: Anchor/s with all the trim & screw components necessary to complete one gypsum wallboard (drywall) installation




Installations that occur with tile, not after

Organization Products

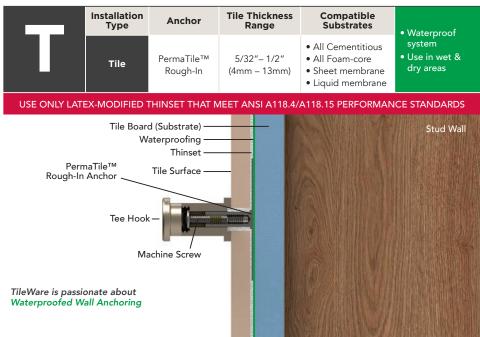


Accessibility ADA Grab Bars

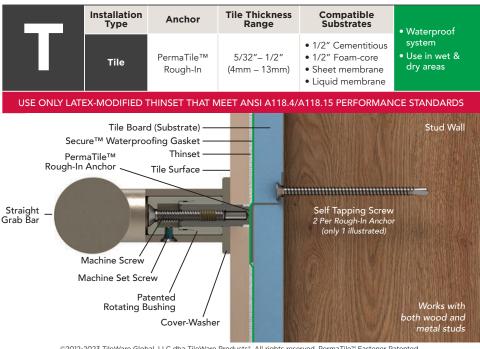


Installations for Gypsum Wallboard (drywall) requiring blocking

Organization Products

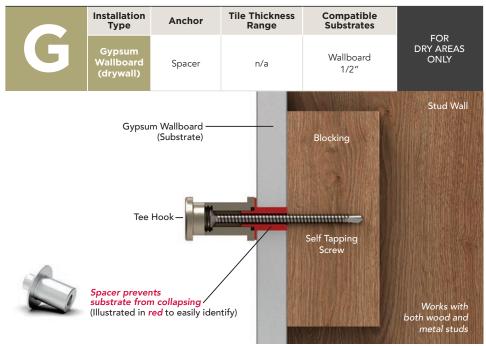

Accessibility ADA Grab Bars

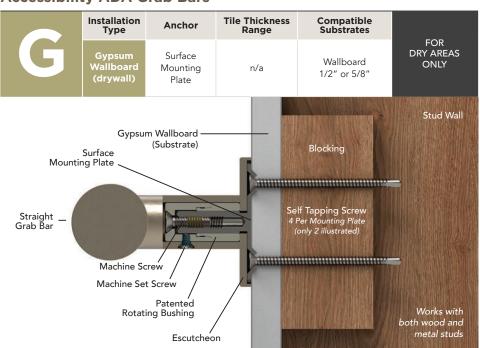

This chart explains how TileWare works with your tile shower materials

1	Material Categories	Points to Learn About	3 Important Selection and Installation Details
	Tile	Tile Thicknesses	PermaTile™ Rough-In Anchors generally work with tile thicknesses from 5/32" to 1/2" (4mm – 13mm).
ALWAYS SELECT TILE & ACCESSORIES TOGETHER		Tile Anchoring Locations	Anchors can be located in the grout joint or drilled into the tile body.
	Accessories	Organization: Baskets and Shelving	Both single and corner wall baskets are available. Great for salon containers and bar soaps. Position above or below the shower valve trim without violating waterproofing or plumbing. As an additional solution, use in applications where the structure prohibits niches or on masonry walls.
		Organization: Hooks	Organize anything that hangs with a rope: soaps, poufs, scrubbers, sponges, loofahs, body brushes, robes, squeegees, towels and washcloths, shower caps, toys and clothing. Great in conjunction with niches.
		Organization: Towel Bars	Organize washcloths inside the shower or bath mats and towels outside the shower. Great in conjunction with niches.
		Organization: Claddy-T™ Corner Shelving	Metal corner shelving with colored fused glass. 11 pre-sized glass tile colors available. Can also install natural stone, porcelain and ceramic (even mosaics) in the metal tray. Pre-sloped for drainage and lugged for grout spacing.
		Accessibility: Grab Bars	ADA compliant grab bars that don't look institutional. Minimal design with small escutcheons and wall terminations. Can position straight models horizontally, diagonally or vertically. Curved grab bars also available to assist with sitting and standing where a seat is needed.
		Accessibility: Foot Prop	Assistive foot rest for shaving legs and washing lower extremities. Includes low profile treads for slip resistance. Great for use in the hospitality industry.
USE THE RIGHT METHODS, MATERIALS & WATERPROOFING	Thinset, Timing & Tools	General Accessory PermaTile™ Rough-In Anchors	General accessory Rough-In Anchors, made from stainless steel. Engineered to install on top of waterproofed substrates. Anchors are positioned and installed behind tile in A118.4 or A118.15 thinset adhesives.
		Grab Bars PermaTile™ Rough-In 'Z' Anchors	Grab Bar Rough-In 'Z' Anchors, made from stainless steel. Engineered to install with tile substrates. After waterproofing, install tile using A118.4 or A118.15 thinset adhesives.
		Drilling	With general accessory anchors and when installing grab bars with small format tiles, use a 3/8" or 10mm diamond core bit to drill the hole/s necessary to accommodate Rough-In Anchors. For large format tiles, we provide a cover-washer option for grab bars that allows up to a 3/4" or 20mm diamond core bit so thinset ridges can be collapsed.
		Mounting Accessories/ Trim	Before mounting accessories on tile surfaces, Rough-In Anchors must cure in thinset for 24 hours. Accessories can be immediately installed after grouting.
	Waterproofing	Foam-core Systems	PermaTile™ Rough-In 'Z' Anchor needs to be attached to wood or metal studs in 2 locations. Rough-In 'Z' Anchors will waterproof with foam-core bonded shower systems or approved polyurethane-based adhesive sealant systems. Tile is then installed on top of waterproofed system using A118.4 or A118.15 thinset adhesives.
		Sheet Membrane Systems	PermaTile™ Rough-In 'Z' Anchor needs to be attached to wood or metal studs in 2 locations. Rough-In 'Z' Anchors will waterproof with (thinset applied) sheet membrane systems. Tile is then installed on top of waterproofed system using A118.4 or A118.15 thinset adhesives.
		Liquid Membrane Systems	PermaTile™ Rough-In 'Z' Anchor needs to be attached to wood or metal studs in 2 locations. Rough-In 'Z' Anchors will waterproof with liquid applied membrane systems that have the capacity to adhere to stainless steel. Tile is then installed on top of waterproofed system using A118.4 or A118.15 thinset adhesives.
		Waterproofing Weld Projections	Use TileWare's Secure™ Waterproof Gaskets with rubberized flexible collars to create a seamless and watertight connection over weld projections. Gasket models are equipped with (2) holes that will match the separation between projections. Bond gaskets to waterproof substrates using A118.4 or A118.15 thinset adhesives.





